


SWL R 1100 Bin-Up



POWERED by
HONDA

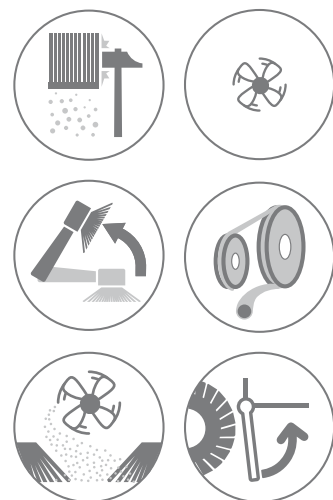

MORE INFO



CHARACTERISTICS

- Large filter surface distributed on 8 cartridge filters fitted with electric filter shaker.
- Side brush raising control.
- **Complete right/left side brush.**
- Anti-trace wheels (mod.ET).
- 2 m steering angle and lift flap pedal.
- Main brush pressure regulation.
- Service and parking brake.
- Hour meter and klaxon and flashing light.
- Indirect back collection.
- Front dust vacuum system.
- Quick changing of the main brush and side brush without tools.
- Long life elastic belts.
- Suction selection lever.
- Antistatic device.
- Battery level indicator (mod.ET).
- 115 lt wide collector tank.
- Dumping height, hydraulic lift 1450 mm
- Heavy duty steel frame.
- Adjustable seat.
- Battery and battery charger not included.
- 24V - 1200W AC three-phase traction motor
- **Front working light system.**

TECHNICAL DATA

	SWL R 1100 ET BIN-UP	SWL R 1100 DT BIN-UP	SWL R 1100 ST BIN-UP
code	39002-00043	39002-00041	39002-00045
main brush width	800mm / 31,50 inc	800mm / 31,50 inc	800mm / 31,50 inc
main brush + 1 side brush	1050mm / 41,34 inc	1050mm / 41,34 inc	1050mm / 41,34 inc
main brush + 2 side brushes	1300mm / 51,19 inc	1300mm / 51,19 inc	1300mm / 51,19 inc
collector tank	115 lt / 30,3 gal	115 lt / 30,3 gal	115 lt / 30,3 gal
max working capacity	9700 m ² /h-104409 ft ² /h	9700 m ² /h-104409 ft ² /h	9700 m ² /h-104409 ft ² /h
traction / limiting gradient	front wheels / 20%	front wheel / 10%	front wheel / 10%
max speed	7,5 km/h-4,66 mile/h	7,5 km/h-4,66 mile/h	7,5 km/h-4,66 mile/h
motor type / power	24V/3,47 kW	Diesel Yanmar 6,7 Hp/4,92 kW	Honda 6,5 Hp/4,88 kW
filtering surface	6,4 m ² / 68,89 ft ²	6,4 m ² / 68,89 ft ²	6,4 m ² / 68,89 ft ²
filter shaker	electric	electric	electric
dimension (cm)/weight	160x101x130/448 kg	160x101x130/454 kg	160x101x130/434 kg

PLUS



Complete right/left side brush with brush raising control system



Heavy duty steel frame and wide collector tank. Perfectly balanced weight of the components, thus resulting in totally safe quick changes of direction



Panel control with: suction switch off system, battery level indicator (ET model), on/off key, hour meter and horn. Flashing light and front working light system



DSA system: unload device for tank emptying into dust containers up to 145 cm height.

Available models with limiting gradient 20%

- SWL R 1100 DT BIN-UP cod. 39002-00057
- SWL R 1100 ST BIN-UP cod. 39002-00059

On request model with overhead guard

STANDARD EQUIPMENT

 <ul style="list-style-type: none"> • 00080-04137 PP SWL R 1100 ET • 00080-04139 PP-Mixed steel SWL R 1100 DT/ST/GT 	 <ul style="list-style-type: none"> • 2 x 00080-04138 PP SWL R 1100 ET • 2 x 00080-04140 PP-Mixed steel SWL R 1100 DT/ST/GT 	 <ul style="list-style-type: none"> • 8 x 00070-00435 paper filter 20 µm 		
--	--	--	--	--

OPTIONAL

<ul style="list-style-type: none"> • 00070-00435 polyester filter 	<ul style="list-style-type: none"> • 00070-00438 Hepa filter 	<p>model ET:</p> <ul style="list-style-type: none"> • 4 x 00055-00157 tubular battery pb-acid - 6V 320 Ah C5 <ul style="list-style-type: none"> • 1x 10002-07866 • 1x 10002-08044 	<p>model ET:</p> <ul style="list-style-type: none"> • 00056-00069 - battery charger 24V-60A 230V 50-60 Hz 	
--	---	---	--	--