


## SWL R 1000



POWERED by  
**HONDA**

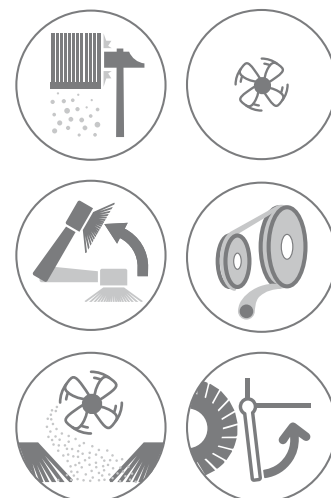

MORE INFO



### CHARACTERISTICS

• Ideal for large surfaces • Large filter surface distributed on 6 cartridge filters fitted with electric filter shaker • Side brush raising control • **Complete right/left side brush** • Suction switch off • Flashing light • Main brush pressure regulation • Indirect back collection • Front dust vacuum system • Quick changing of the main brush and side brush without tools • Long life elastic belts • Suction selection lever • Antistatic device • Battery level indicator (ET model) • Wide collector tank • Heavy duty steel frame • Adjustable seat • Perfectly balanced weight of the components, thus resulting in totally safe quick changes of direction • Battery and battery charger not included. • Front light system (**optional on request**), standard for models code 39002-00030/39002-00039

### TECHNICAL DATA

	SWL R 1000 ET	SWL R 1000 ST	SWL R 1000 ET Light	SWL R 1000 ST Light
code	39002-00074	39002-00075	39002-00030	39002-00039
main brush width	700 mm / 27,56 inc	700 mm / 27,56 inc	700 mm / 27,56 inc	700 mm / 27,56 inc
main brush + 1 side brush	920 mm / 36,22 inc	920 mm / 36,22 inc	920 mm / 36,22 inc	920 mm / 36,22 inc
main brush + 2 side brushes	1150 mm / 45,28 inc	1150 mm / 45,28 inc	1150 mm / 45,28 inc	1150 mm / 45,28 inc
collector tank	62 lt / 16,3 gal	62 lt / 16,3 gal	62 lt / 16,3 gal	62 lt / 16,3 gal
max working capacity	6200 m <sup>2</sup> /h-66736 ft <sup>2</sup> /h	7700 m <sup>2</sup> /h-82881 ft <sup>2</sup> /h	6200 m <sup>2</sup> /h-66736 ft <sup>2</sup> /h	7700 m <sup>2</sup> /h-82881 ft <sup>2</sup> /h
traction / limiting gradient	rear wheels / 10%	front wheel / 17%	rear wheels / 10%	front wheel / 17%
max speed	5,8 km/h-3,60 mile/h	7,2 km/h-4,5 mile/h	5,8 km/h-3,60 mile/h	7,2 km/h-4,5 mile/h
motor type / power	24V / 1150W	Honda 5,5 HP / 4,1kW	24V / 1150W	Honda 5,5 HP / 4,1kW
filtering surface	6 m <sup>2</sup> / 64,6 ft <sup>2</sup>	6 m <sup>2</sup> / 64,6 ft <sup>2</sup>	6 m <sup>2</sup> / 64,6 ft <sup>2</sup>	6 m <sup>2</sup> / 64,6 ft <sup>2</sup>
filter shaker	electric	electric	electric	electric
dimension (cm)/weight	143x91x114/260kg	143x91x114/300kg	143x91x114/260kg	143x91x114/300kg

**PLUS**



Complete right/left side brush with brush raising control system



Heavy duty steel frame and wide collector tank. Perfectly balanced weight of the components, thus resulting in totally safe quick changes of direction



Panel control with: suction switch off system, battery level indicator (ET model) and on/off key. Flashing light



Large filter surface distributed on 6 cartridge filters fitted with electric filter shaker

**Available models with limiting gradient 20%**

- SWL R 1000 ET cod. 39002-00049 • SWL R 1000 ET Light cod. 39002-00050
- SWL R 1000 ST cod. 39002-00051 • SWL R 1000 ST Light cod. 39002-00052

**STANDARD EQUIPMENT**

 <ul style="list-style-type: none"> <li>• 00080-04142 PP SWL R 1000 ET</li> <li>• 00080-04133 PP-Mixed steel SWL R 1000 ST</li> </ul>	 <ul style="list-style-type: none"> <li>• 2 x 00080-04126 PP SWL R 1000 ET</li> <li>• 2 x 00080-04136 PP-Mixed steel SWL R 1000 ST</li> </ul>	 <ul style="list-style-type: none"> <li>• 6 x 00070-00430 paper filter 14 µm</li> </ul>		
--	--	--	--	--

**OPTIONAL**

<ul style="list-style-type: none"> <li>• 10001-07819 Anti-trace wheels</li> </ul>	<ul style="list-style-type: none"> <li>• 00070-00436 polyester filter</li> <li>• 00070-00437 Hepa filter</li> </ul>	<ul style="list-style-type: none"> <li>• 00054-01367 Steel collector tank</li> </ul>	<ul style="list-style-type: none"> <li>• 00039-01772 Right brush protection</li> </ul>	<ul style="list-style-type: none"> <li>• 00039-01769 Left brush protection</li> </ul>
<ul style="list-style-type: none"> <li>• 00072-00509 overhead guard</li> </ul>	<ul style="list-style-type: none"> <li>model ET:</li> <li>• 4 x 00055-00013 tubular battery pb-acid 6V180Ah C5</li> </ul>	<ul style="list-style-type: none"> <li>model ET:</li> <li>• 4 x 00055-00142 GEL Battery 6 MFP 180-6V 180Ah C5</li> </ul>	<ul style="list-style-type: none"> <li>model ET:</li> <li>• 4 x 00055-00107 Battery - 6V 250Ah C5</li> </ul>	<ul style="list-style-type: none"> <li>model ET:</li> <li>• 00056-00067 Battery Charger 24V 30A 115-240/50-60 + Connection cable battery charger RB50-RB80: cod 10002-08044</li> <li>+ Connection cable battery charger RB80-RB175: cod 10002-07866</li> </ul>